







FIRESMART BEGINS AT HOME GUIDE





FireSmart, Intelli-feu and other associated Marks are trademarks of the Canadian Interagency Forest Fire Centre (CIFFC).

To order this guide contact:

general@firesmartcanada.ca



Canadian Interagency Forest Fire Centre Inc. assumes no responsibility or liability and expressly disclaims responsibility or liability for any loss or damage that any person may sustain as a result of the information in, or anything done or omitted in reliance on this pamphlet; and any personal injury or bodily injury, including death, and any loss or damage caused by a wildland fire to insured or uninsured structures and/or property where FireSmart principles have been applied.







UNDERSTANDING FIRE BEHAVIOUR

FIRE + FUEL = WHY HOMES BURN





FireSmart-Mitigated Property

Fuels include trees, woodpiles, structures, fences, plants, etc.



How Wildland Fires Spread

Embers & Sparks

Embers and sparks can blow up to two kilometres ahead of a wildland fire. They can ignite materials on or near your home causing severe damage.



Extreme Heat

Radiant heat from a wildland fire can melt vinyl siding, ignite your home, and even break windows. Extreme heat can come from flames within 30 metres of your home.



Direct Flame


As wildland fires spread toward homes, they ignite other flammable objects in their path. To stop wildland fire from directly affecting your home, create breaks in this path, especially close to your home.



Factors Influencing the Spread of **Wildland Fire**

Dense Continuous Forests

Wildland fire can spread quickly in forests where trees are near each other. Fire spreads directly from tree to tree, and can produce sparks and embers that may travel distances of two kilometres. These embers may land on trees or homes well ahead of the fire and create multiple fire situations. It is important to be aware of the dangers of sparks and embers when creating a FireSmart property.

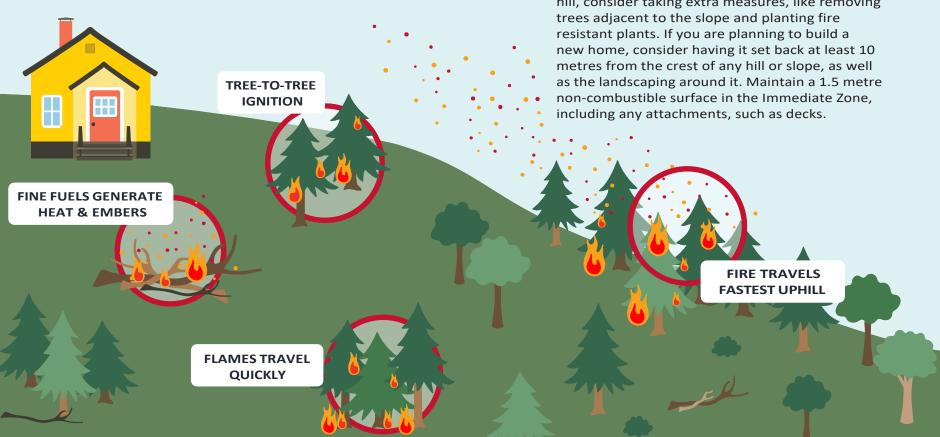



Coniferous trees are highly flammable.





Deciduous trees are less flammable.



Slope

Fire moves fastest uphill. The steeper the slope, the faster a wildland fire will spread. Homes on hills, or at the top of hills, face the greatest risk from wildland fire. If your home is located on a hill, consider taking extra measures, like removing




Yard Spacing

Changes within 10 metres of your home will have the biggest impact.



Tree Spacing

Spacing trees at least 3 metres apart will help reduce the intensity of a wildland fire.



Prune Trees

Prune all tree branches within 2 metres from the ground.





BEGIN YOUR FIRESMART JOURNEY

Each section of this guide will help you to focus on the changes that protect your home from wildland fire. Start from your home and work your way outward. Changes made to the area closest to your home, and your home itself, have the greatest impact in reducing your risk of wildland fire damage.

Making the Most of Your Time

Home renovations and upgrades can be costly and time-consuming. FireSmart principles focus on what is realistic for you to achieve to limit the risk of wildland fire to your home. Integrate FireSmart into your long-term renovation plans and incorporate regular yard cleanup to reduce your risk of damage from wildland fire.



IMMEDIATE ZONE 0 m to 1.5 m

A minimum 1.5 metre noncombustible surface should extend around the entire home and any attachments, such as decks.

INTERMEDIATE ZONE

1.5 m to 10 m

This should be a fire-resistant area, free of all materials that could easily ignite from a wildland fire.

EXTENDED ZONE

10 m to 30 m

Thin and prune evergreen trees to reduce hazards in this zone. Regularly remove accumulations of fallen branches, and dry grass/needles to eliminate potential surface fuels.

Look for opportunities to create a fire break by creating space between trees and vegetation. Thinning and pruning is effective here as well. These actions will help reduce the intensity of a wildland fire.

IMMEDIATE ZONE

0 m to 1.5 m

The Immediate Zone is a non-combustible area that starts at the house and extends to a 1.5 metre perimeter around the home and attached structures, including decks. Reduce the chance of wind-blown embers igniting your home by starting with proactive measures outlined in this guide.

DOORS

All doors into your home should be fire-rated and have a good seal. This is true for your garage doors, as well as entry doors.

WINDOWS

Tempered or thermal (multi-paned) windows are recommended.
Single-pane windows provide little resistance to heat from an advancing wildland fire.

ROOF

Material

A Class-A fire-rated roof assembly offers the best protection. Metal, asphalt, clay, and composite rubber tiles are all options. Untreated wood shakes create a dangerous combination of combustible material and crevices for embers or sparks to enter. Refer to manufacturers' guidelines to maintain the fire resistance of your roof.

Maintenance

Every inside-corner of your roof is a place where debris and embers can collect. Regularly clean your roof of combustible materials.



SIDING

Stucco, metal, brick, concrete, and fiber cement siding offer superior fire resistance. Logs and heavy timbers are also reasonably effective. Untreated wood and vinyl siding offer very little protection against wildland fire.

GUTTERS

Regularly remove debris from your gutters, as sparks and embers can easily ignite these dry materials. Consider screening your gutters with metal mesh to reduce debris that can accumulate.

DECKS

It is important to sheathe-in the base of decks, balconies, and houses, as embers and sparks can collect under these spaces. Use fire-resistant material to reduce the risk of sparks and embers from igniting your home.

CHIMNEY

A spark arrestor on your chimney will reduce the chance of sparks and embers from escaping and starting fires.

GROUND-TO-SIDING CLEARANCE

Siding is vulnerable when it ignites and when flames or embers get into the cavity behind it. With inadequate ground-to-siding clearance, accumulated embers can ignite combustible siding directly.

15 centimetres of ground-to-siding non-combustible clearance is recommended.

EAVES AND VENTS

While vents play an important role in removing moisture from attics, they create an opening for sparks and embers. Install vents made of non-combustible material with 3 millimetre screening, or ASTM fire-rated vents. Open eaves also create a surface for embers and direct heat. Properly fitted soffits and fascia help to reduce the risk of embers and heat from reaching the wooden rafters of your home.

OTHER

Attachments to Your Home

Wooden fences or boardwalks create a direct path from the fire to your home. Separating your house from a wooden fence with a metal gate can slow the advance of fire. Remember to cut the grass along your fence line, as long, dry grass easily ignites.

Sheds and Outbuildings

Give sheds and outbuildings the same FireSmart considerations as you do for your home.

INTERMEDIATE ZONE

1.5 m to 10 m

Elements in the Intermediate Zone are managed so they don't transmit fire to your home. There are many actions you can take to reduce your home's vulnerability in the Intermediate Zone.



LANDSCAPING WITHIN 10 METRES

A FireSmart yard includes making smart choices for your plants, shrubs, grass, and mulch. Selecting fire-resistant plants and materials can increase the likelihood of your home surviving a wildland fire.

Plant low-density, fire-resistant plants and shrubs. Avoid having any woody debris, including mulch, as it provides potential places for fires to start. Make sure that you maintain a 1.5 metre non-combustible zone around your entire home and any attachments.

CHARACTERISTICS OF FIRE-RESISTANT PLANTS

- Moist, supple leaves
- Accumulates minimal dead vegetation
- Water-like sap with little odour
- Low amount of sap or resin material

CHARACTERISTICS OF HIGHLY FLAMMABLE PLANTS

- Leaves or needles are aromatic
- Accumulates fine, dry, dead material
- Contains resin or oils
- · Loose, papery, or flaky bark

PLANTS TO AVOID

- Cedar
- Juniper
- Pine
- Tall grass
- Spruce

GRASS

A mowed lawn is a fire-resistant lawn. Grasses shorter than 10 centimetres in height are less likely to burn intensely.



Bark mulches are highly flammable.



Firewood piles should be stored at least 10 metres from your home.

BARK MULCH & PINE NEEDLES

Do not use bark or pine needle mulches within 10 metres of your home, as they are highly combustible. Gravel mulch and decorative crushed rock mulch significantly reduce the risk of wildland fire.

FIREWOOD PILES

Wood piled against a house is a major fire hazard. Moving your firewood pile may be the factor that allows your home to survive a wildland fire. Move firewood piles to the Extended Zone (10 – 30 metres from your home), or into a FireSmartmitigated building.

BURN BARRELS & FIRE PITS

Burn barrels should be placed as far as possible from structures and trees. Keep the area within 3 metres of the burn barrel free of combustible material. Always ensure that your burn barrel has proper ventilation and is screened with 6 millimetre or finer wire mesh.

Check with your local municipality regarding specific requirements and restrictions for backyard fire pits.


Fire permits for both burn barrels and fire pits are required in many jurisdictions.

POWER LINES

Power lines should be clear of branches and other vegetation. Contact your local utility company to discuss removing any branches or vegetation around overhead electrical installations.


ON-SITE FIRE TOOLS

Every home should have readily accessible shovels, rakes, axes, garden hoses, sprinklers, and ladders to assist in suppressing wildland fires.



MAINTENANCE

- Include debris clean-up in spring and fall as part of your yard maintenance.
- Dry leaves, twigs, and branches are flammable and should be removed from your yard and gutters.
- Older deciduous trees can have rot and damage that make them susceptible to wildland fire. An arborist or forester can help assess the condition of mature trees.
- Remove combustible shrubs from the drip line of trees.

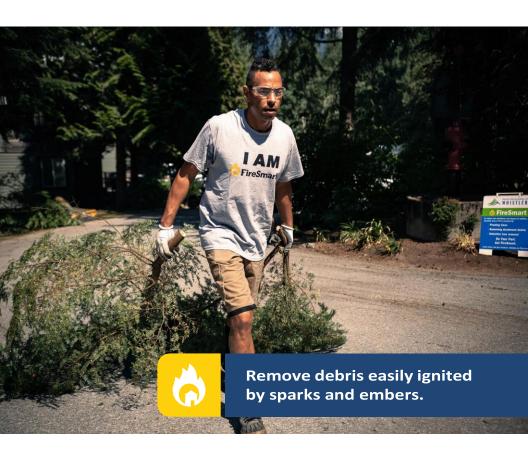



TREES TO PLANT

Deciduous trees (leafy) are resistant to wildland fire and include:

- Poplar
- Birch
- Aspen
- Cottonwood
- Maple
- Alder
- Ash
- Cherry

TREES TO AVOID

Coniferous trees (with cones and needles) are highly flammable and should not be situated within 10 metres of your home. These include:

- Spruce
- Fir
- Pine
- Cedar

EXTENDED ZONE

10 m to 30 m


The goal in the Extended Zone is not to eliminate fire, but to reduce its intensity. If your property extends into this zone, there are many proactive measures you can take.

TREE-TO-TREE SPACING

Once fire moves into the treetops, it can easily move into neighbouring trees and increase the overall intensity of the fire. Spacing trees at least 3 metres apart will reduce the risk of this happening.

CONIFEROUS TREE SPACING

Because coniferous trees are particularly flammable, it is important to measure the distance between the outermost branches of these trees. There should be a minimum of 3 metres between them.

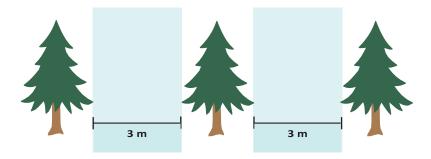

TREE PRUNING

A surface fire can climb trees quickly. Removing all branches within 2 metres from the ground will help stop surface fires from moving into the treetops.

Pruning all trees within 30 metres of your home is recommended. If possible, prune all trees within 100 metres of your home.

WHEN TO PRUNE


You can prune dead branches at any time of year, but it is best to prune coniferous trees in late winter when they are dormant.

HOW TO PRUNE

Prune branches close to the tree trunk, but not so close that you damage the main trunk and bark of the tree.

Never remove more than 1/3 of the canopy of a tree.

Doing so may harm it.



Prune branches within 2 metres from the ground.



LARGE YARDS

30 m+

Taking FireSmart actions beyond 30 metres from your home will influence how a wildland fire approaches your home. You can change the dynamics of wildland fire behaviour by manipulating vegetation in this space. FireSmart treatments within the Immediate, Intermediate, and Extended Zones can influence the amount of work necessary beyond 30 metres.

Just as in the other zones, slope is a consideration. If your home is on a slope, consider extending this area further, as fire moves fastest uphill. Factor in slope stability when removing trees.

The goal in this area is to reduce the intensity and rate of spread of a wildland fire. This is done by thinning and pruning coniferous trees and reducing excess vegetation and branches.

- Remove low-hanging branches within 2 metres from the ground.
- Space trees 3 metres from branch tips to reduce the intensity and rate of spread of fire.
- Remove smaller evergreen trees that can act as a ladder for fire to move into the treetops.
- Clean woody debris and combustible shrubs from the ground.

ROADWAYS AND DRIVEWAYS

In an emergency, you and your family may need to leave your neighbourhood while emergency responders enter. In order for this to happen safely and efficiently, consider the following tips:

- · Clearly mark your address.
- Clear vegetation from access routes to and from your home. Target trees and branches that would make it difficult for a fire truck to approach your home.
- If you have a large property, make sure your driveway has a spot to turn around and, when possible, provide two access routes to your home.

FIRESMART IN YOUR NEIGHBOURHOOD



Many of the recommendations in this guide assume that you have direct control over the property within 30 metres of your home. Even if that is not the case, FireSmart recommendations still apply. Chat with your neighbours about FireSmart. Shared information, along with mutual cooperation and planning can help.



The FireSmart Canada Neighbourhood Recognition Program recognizes neighbourhoods that:

- Complete a neighbourhood hazard assessment and create a FireSmart plan
- Organize a local FireSmart committee
- Work with a Local FireSmart Representative to host a FireSmart event, like a clean-up day
- Contribute in-kind or provide monetary support toward FireSmart actions




Concerned about your community's risk to wildland fire? Ask your elected official, planning department, or fire service about how they are integrating FireSmart into their plans.

THERE'S MORE!

Learn about all our programs and resources online

WWW.FIRESMARTC ANADA.C A

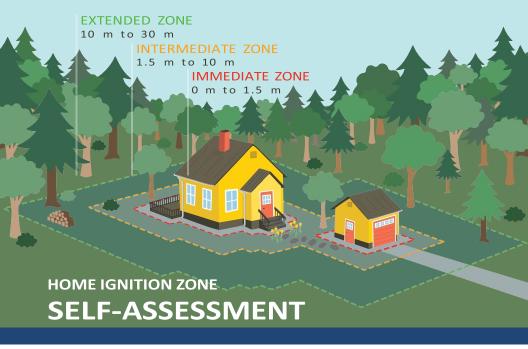

How resilient to wildland fire is your home and property? Walk around your home and answer the questions below. Then consider implementing the recommended actions as you perform maintenance and renovations in each of the three Home Ignition Zones.

IMMEDIATE ZONE

0 m to 1.5 m

The Immediate Zone should be a non-combustible area that starts at the house and extends to a 1.5 metre perimeter around the home and any attachments. Treat outbuildings to the same standards as your home.

1. Does the structure have acceptable fire-rated roofing material?

YES	

NO



A Class-A fire-rated roof assembly offers the best protection. Metal, asphalt, clay, and composite rubber tiles are all options. Untreated wood shakes create a dangerous combination of combustible material and crevices for embers or sparks to accumulate and enter. Refer to manufacturers' guidelines to maintain the fire resistance of your roof.

2. Are the root and gutters non-combustible and clean of debris?					
YES NO		Every inside-corner of your roof is a place where debris and embers can collect. Regularly check and clean combustible debris, like needles and leaves, from the roof and gutters. Consider installing commercial screens or covers over gutters to reduce debris accumulation.			
3. Are the eaves enclosed?					
YES		Open eaves create a surface for embers and radiant heat.			
NO	\Rightarrow	Consider enclosing eaves with properly fitted soffits and fascia to reduce the risk of embers and heat from reaching the wooden rafters of your home.			
4. Are the vents non-combustible and screened?					
YES		Unscreened vents can allow embers to enter a building.			
NO	\Rightarrow	With the exception of dryer vents, install non-combustible vents with 3 mm metal screening in order to limit embers from accessing your home. Ensure dryer vents are clean and operational.			
5. Is exterior siding non-combustible or ignition-resistant?					
YES		Some types of construction material, like vinyl siding, can melt when exposed to high temperatures allowing the fire			
NO	\Rightarrow	to reach the underlying wall components and penetrate the interior of the building. Stucco, metal, brick, concrete, and fibre cement siding offer superior fire resistance.			
6. Is exterior siding free of gaps, holes, or other areas where embers can accumulate?					
YES		Examine your siding for locations where embers could			
NO	\Rightarrow	accumulate or lodge. Be sure to fix any holes and gaps in exterior siding in order to prevent embers from igniting your home.			
7. Are windows multi-pane or tempered glass?					
YES		Single pane glass windows are highly vulnerable to breakage from radiant heat exposures that can occur			
NO	\Box	during wildland fires. Multi-pane windows are less			

8. Are ext	erior doors non-combustible, or fire-rated?				
YES ☐ NO ➡	All doors into your home should be fire-rated, or non-combustible and have a good seal. This is also true for garage doors.				
9. Are exterior walls protected with a minimum 15 cm vertical non-combustible ground-to-siding clearance?					
YES ☐ NO ☐	Creating a non-combustible vertical ground-to-siding clearance can be achieved by lowering the level of the ground to expose the foundation walls. It can also be achieved by replacing the first 15 cm of combustible siding with non-combustible siding material or flashing. This will limit the risk of siding igniting as a result of ember accumulation at the base of the building.				
10. Is the deck/porch enclosed?					
YES ☐ NO ☐	Consider enclosing the underside of the deck or porch with non-combustible sheathing, as this will act as a shield against embers. Moving combustible materials stored underneath the deck to the Extended Zone, or storing inside a FireSmart-mitigated building, will limit potential for those materials to ignite.				
11. Is the deck/porch made with fire-rated materials?					
YES NO	Non-combustible, or fire-rated deck or porch materials are ideal when it comes to reducing your wildland fire risk. A non-combustible surface should be under the deck and extend for 1.5 metres out from its perimeter.				
12. Are there combustible materials and landscaping products immediately surrounding your home?					
YES ☐ NO ☐	Reduce the chance of wind-blown embers igniting materials near your home. A non-combustible surface should extend around the structure and any attachments such as decks. Creating a non-combustible surface can be as easy as clearing flammable materials and vegetation. No grass or plants of any type should be present in this zone.				
IMMEDIATE 0 m to 1.5					

INTERMEDIATE ZONE

1.5 m to 10 m

NO 🖒 transmission.

Elements in the Intermediate Zone are managed so they don't transmit fire to your home.

1. Is the lawn cut to a length of 10 cm or less?						
	YES NO		Mowing and maintaining the lawn to a height of 10 cm or less will limit flame intensity and/or spread.			
2. Is the yard free of combustible debris?						
	YES		Regularly remove accumulations of combustible debris			
	NO	\Rightarrow	like needles, leaves, and branches. Ensure that all combustible materials, like woodpiles, building materials, patio furniture, recreation vehicles etc., are moved into the Extended Zone, or a FireSmart-mitigated building.			
Are garden beds lined with crushed rock/decorative gravel?						
	YES		Organic mulch like bark or pine needles are highly			
	NO	\Box	combustible. Crushed rock or decorative gravel significantly reduce the risk of damage from wildland fire.			
4. Does landscaping include fire-resistant plants?						
	YES		Create a landscape that will not easily transmit fire to			
	NO	\Box	your home. Selecting fire-resistant plants can increase the likelihood of your home surviving a wildland fire.			
5. Are coniferous trees pruned to a height of 2 metres?						
	YES		A surface fire can climb trees quickly. Removing all			
	NO	\Box	coniferous branches within 2 metres from the ground will help stop surface fires from moving into the treetops.			
6. Are coniferous trees spaced at least 3 metres apart?						
	YES		Spacing coniferous trees at least 3 metres apart from crown-to-crown will reduce the risk of tree-to-tree fire			

EXTENDED ZONE

10 m to 30 m

The focus in the Extended Zone is not to eliminate fire, but to reduce its intensity.

1. Are all firewood piles and other combustible materials located within the Extended Zone?					
YES	Firewood and combustibles are major fire hazards. Moving				
νο □>	all combustible material into the Extended Zone, or into a FireSmart-mitigated building, is critical to reducing wildland fire risk.				
2. Are coniferous trees pruned to a height of 2 metres?					
YES 🗌	A surface fire can climb trees quickly. Removing all				
№ 🖒	coniferous branches within 2 metres from the ground will help stop surface fires from moving into the treetops.				
3. Are coniferous trees spaced at least 3 metres apart?					
YES 🗌	Spacing coniferous trees at least 3 metres apart from				
NO □>	crown-to-crown will reduce the risk of tree-to-tree fire transmission.				
4. Have accumulations of fallen branches, dry grass, and needles on the ground been removed?					

YES Cleaning up accumulations of fallen branches, dry grass, and needles will reduce potential surface fuels.



The Home Ignition Zone Self-Assessment is a great step to help you on the path to wildland fire resiliency, but there are many factors that can influence your level of preparedness! So, what else can you do to be prepared?

- Take FireSmart 101, our free online course, for a deeper dive into FireSmart and how homes ignite.
- Create an evacuation plan. Find the Last–Minute Checklist on our website.
- Contact your FireSmart Liaison or Local Program Coordinator for a professional assessment of your home or neighbourhood.
- Reach out to general@firesmartcanada.ca with any questions.

Thank you for completing your assessment.

Scan the QR Code to enter our draw to win a prize!



Prizes generously sponsored by:













WWW.FIRESMARTC ANADA.C A